


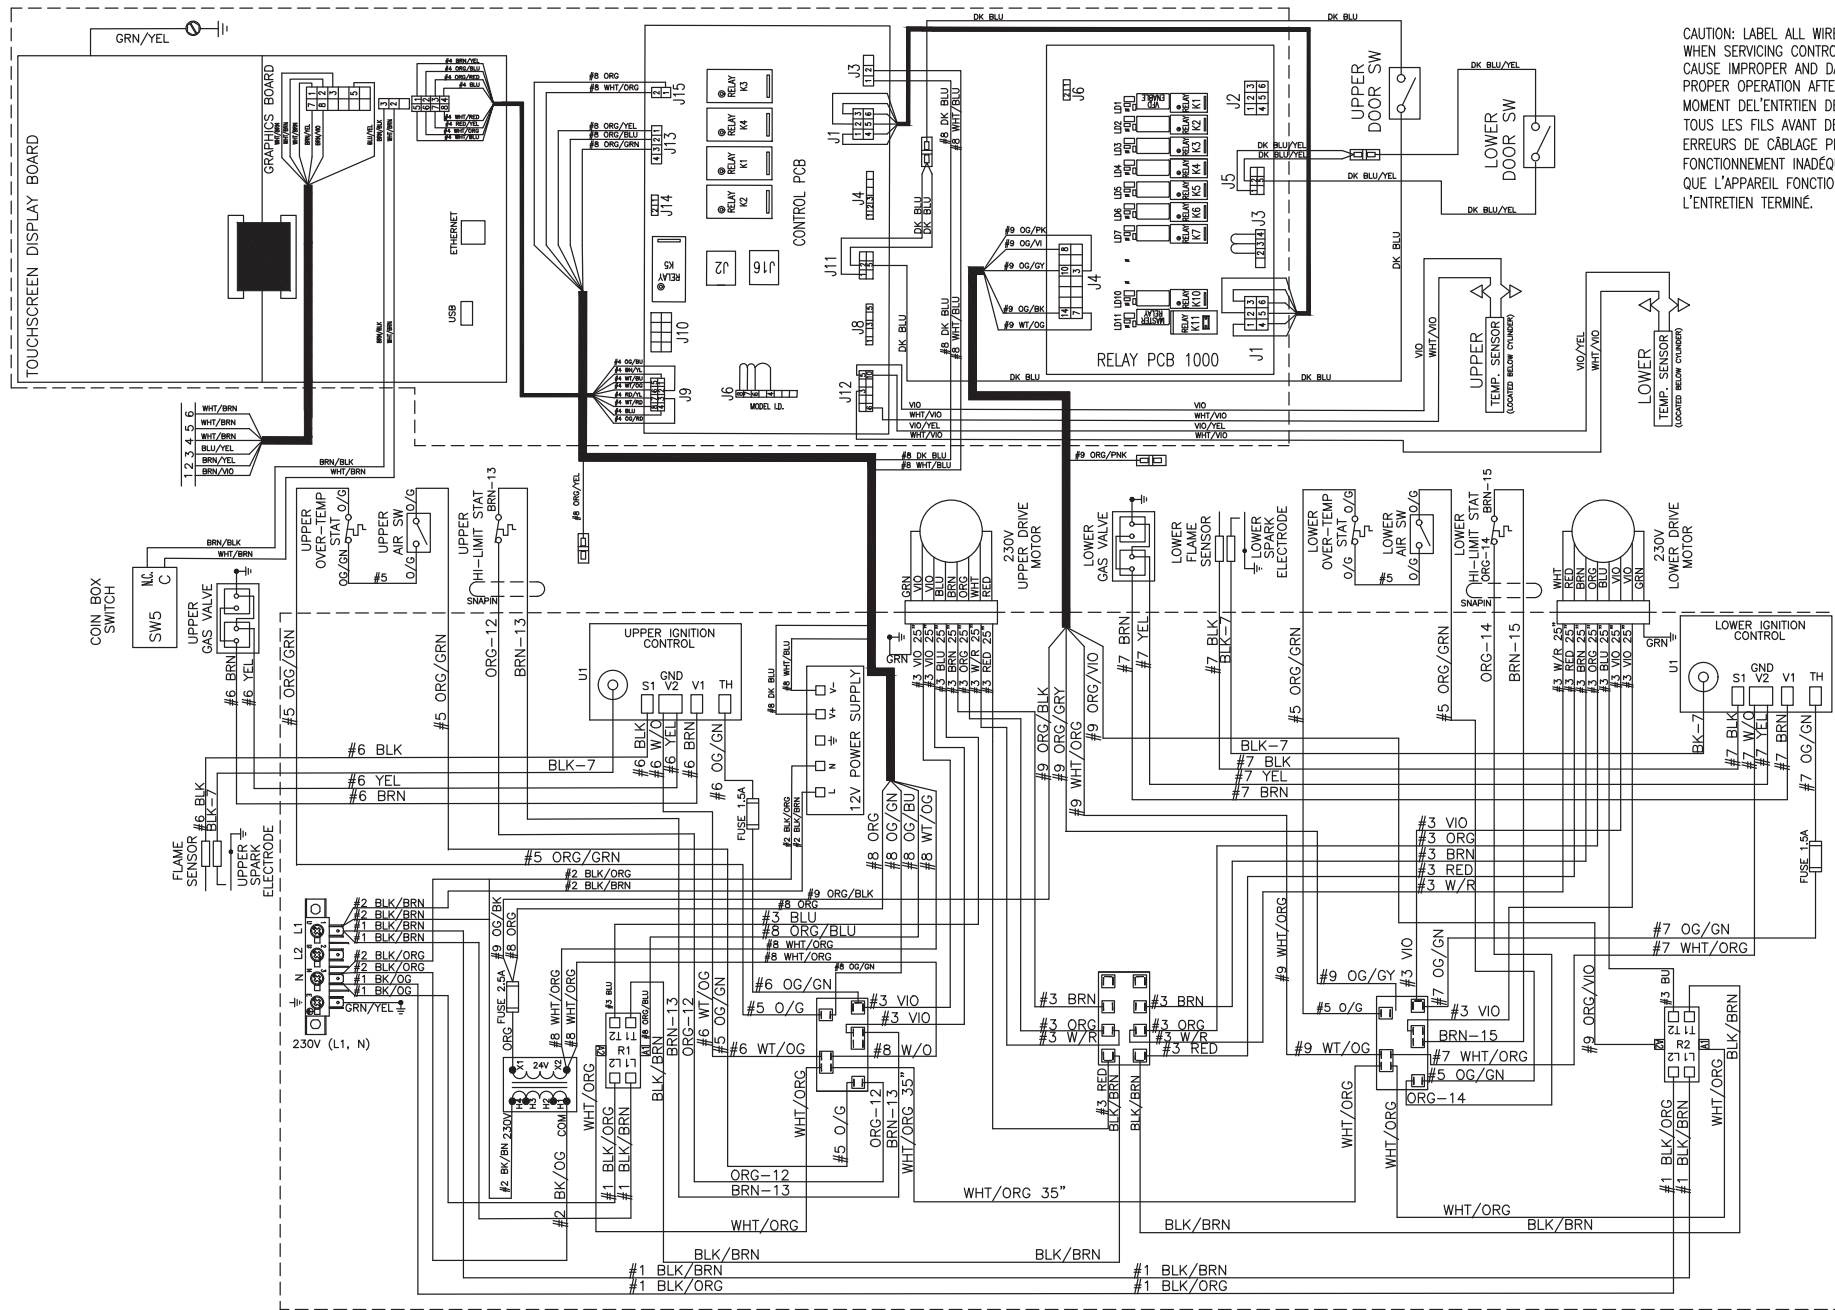

9507-119-001PR


WIRING DIAGRAM

DC30X2N_-39_T_X-_-_-_-_-X

NOTES:

1. DOOR SWITCHES—N.O., CLOSED WHEN DOORS ARE CLOSED.
2. DRYER STARTS WHEN THE DOORS ARE CLOSED, A CYCLE IS SELECTED, AND THE

AUTOMATIC COOL DOWN CYCLE AT THE
END OF THE CYCLE.
CENTRIFUGAL SWITCH-N.O., CLOSES WHEN
BLOWER MOTOR IS UP TO SPEED.
REFER TO OWNER'S MANUAL FOR
DESCRIPTION OF OPERATION AND
REQUIREMENTS FOR HEATING CIRCUIT.
WITH A DC MICROAMMETER, FLAME
CURRENT CAN BE MEASURED AT TEST
POINTS. READING SHOULD BE 0.7uA DC
OR HIGHER.

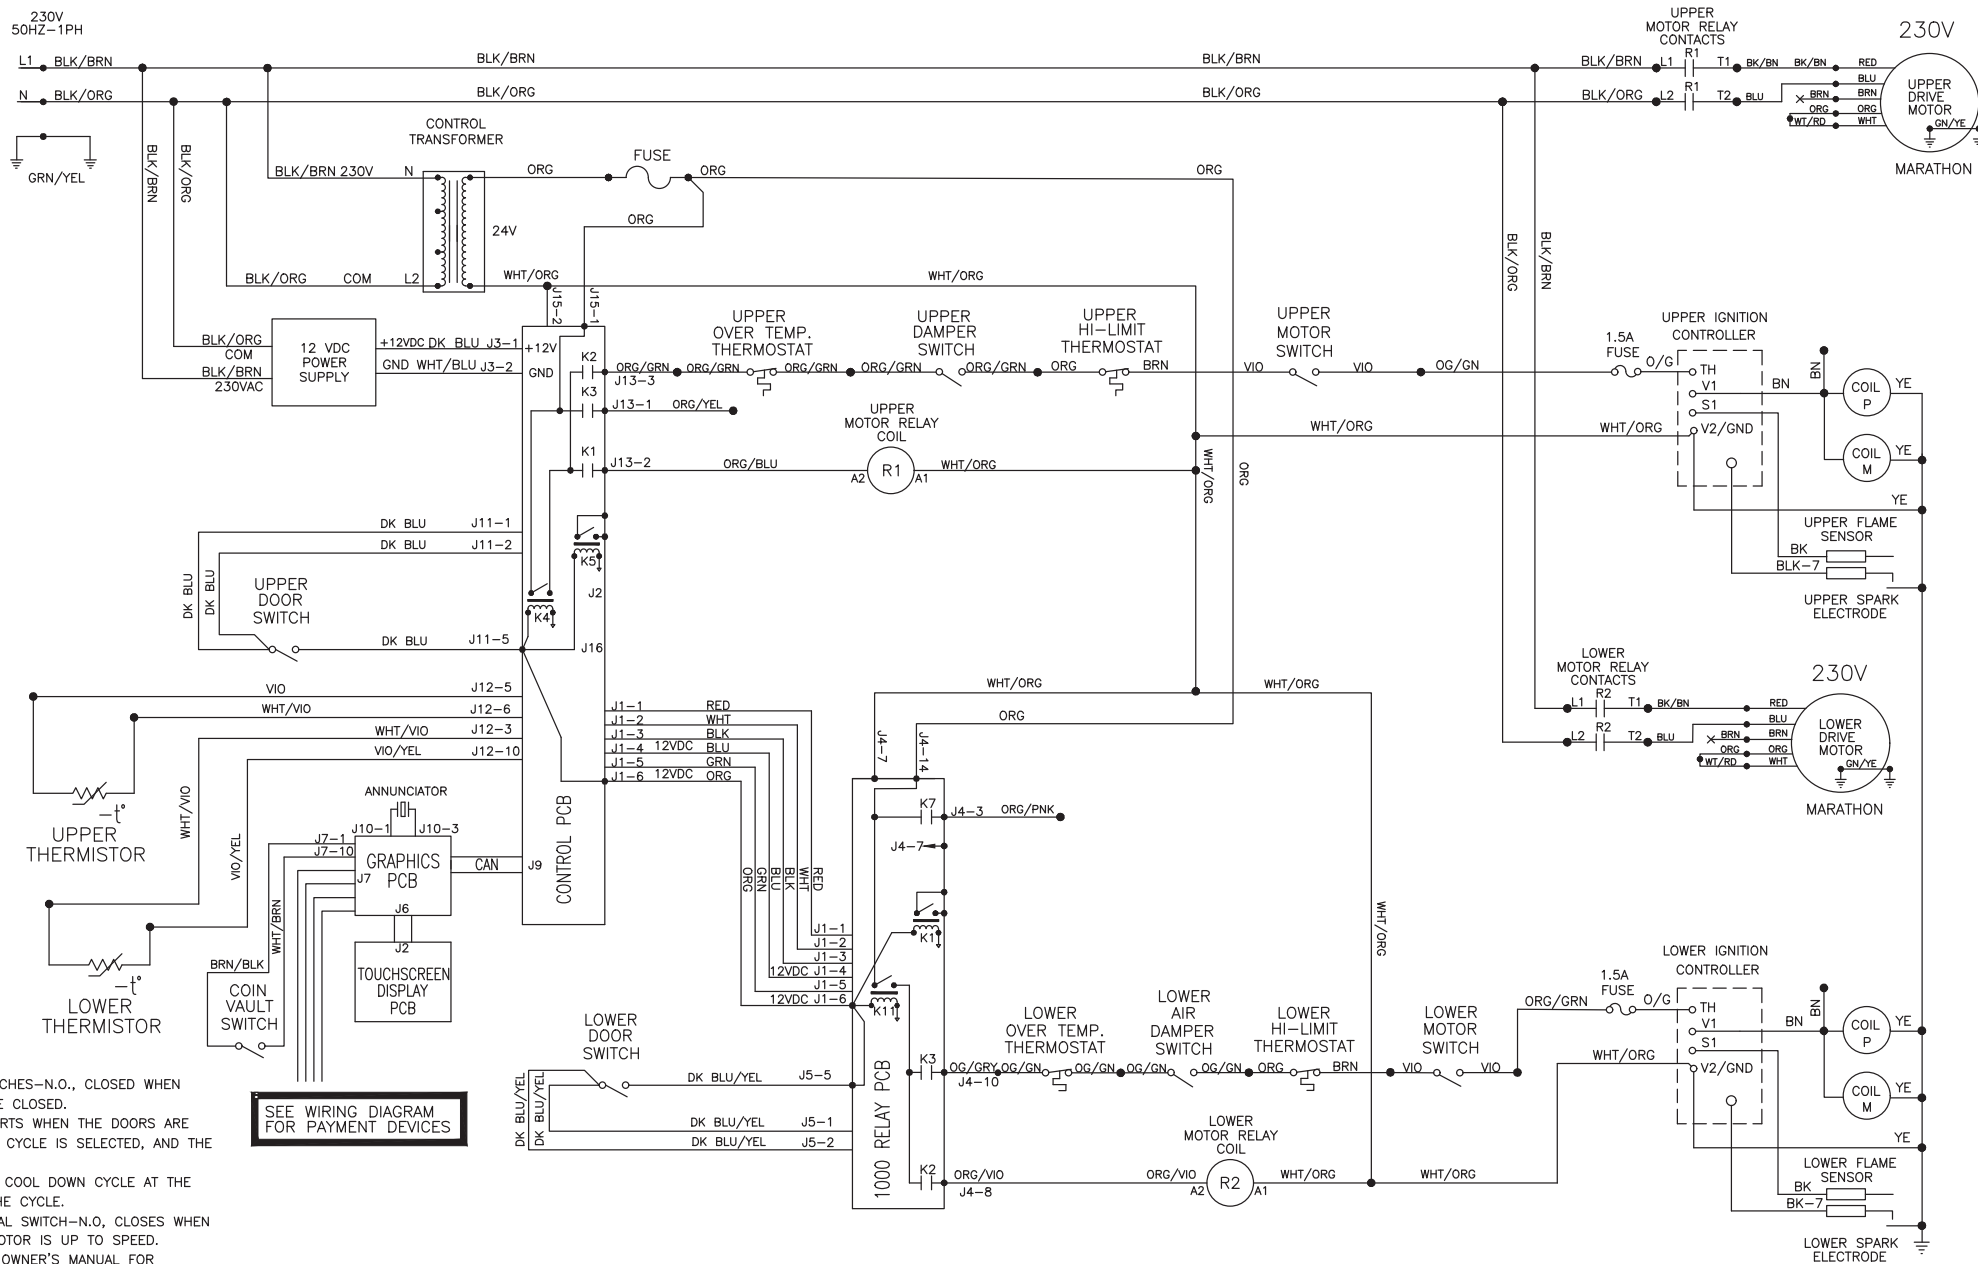

SCHEMATIC

DC30X2N_-39_T_X-_____-__X